
A2200 Video riser-distributor

Introduction


The Raiser-Distributor unit is a 4-output video amplifier which can be configure in two different modes, depending on system layout and configuration.

The unit has built in short circuit indicator as well as separate isolation protection in case of short circuit.

It has an automatic self-check mechanism for simple troubleshooting and system recovery.

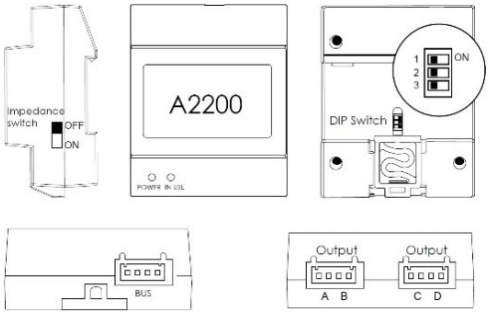

DIP Switch Settings

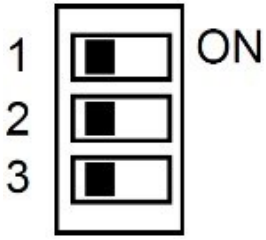

DIP switch 1

ON – Raiser mode

OFF – Distributor mode

DIP switch 2

ON – Not in use (search address)

OFF – Default (end searching)

DIP switch 3

ON – Gain high

OFF – Gain auto

POWER – Video Sync Indicator

RED – Not synced

ORANGE – Synced

IN USE – Status Indicator


OFF – Standby

ON – Device working

SLOW FLASH – Protection

FAST FLASH – Search mode

DIN rail mounting

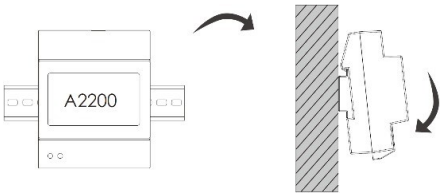

ATIGO