



Features

- Power supply unit for Atigo system;
- Universal AC input/full range;
- Short circuit, overload and over voltage protections;
- Din-rail mounting; DC26V 1.5A output.

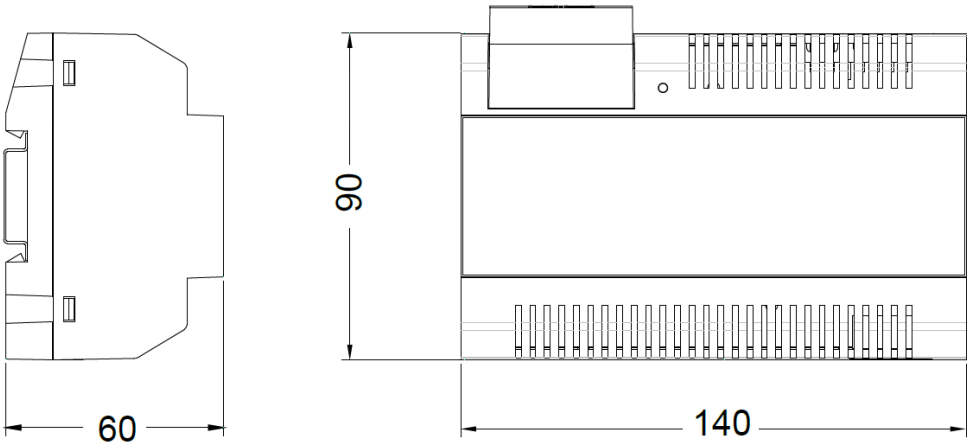

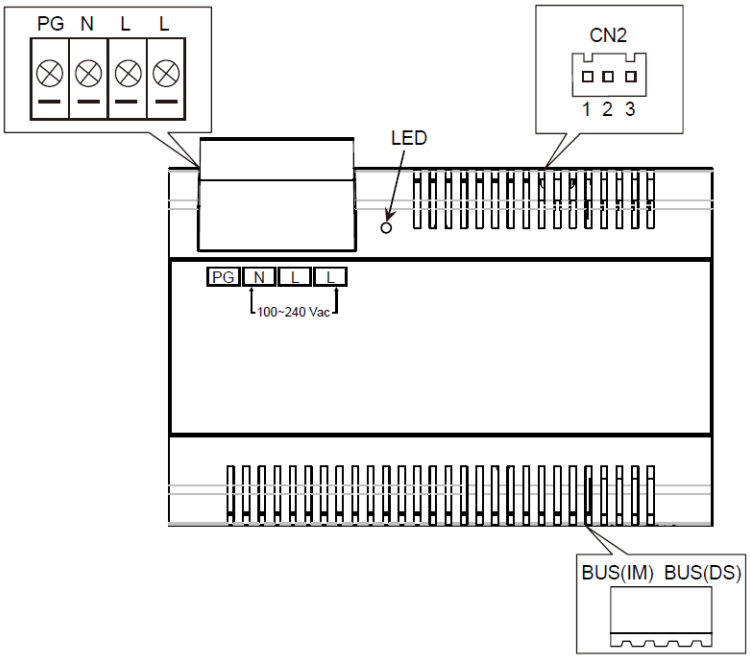

Parts & Functions

- PG: Earth ground port.
- N: AC input.
- L: AC input.
- LED: power indicator, always on when plug in power.
- CN: bus control terminal.
- BUS(IM): indoor monitor connection terminal.
- BUS(DS): door station connection terminal.

Specification

- Input Voltage: 100~240Vac
- Input Frequency: 50~60Hz
- Rated Output Voltage: DC 26V±2V
- Rated Output Current: 1.5A
- Working Temperature: -200C~550C
- SW Port Input Voltage: Max.230Vac, 2A
- Dimension: 140*90*60mm