


Features

- Simple and intuitive menu & navigation;
- 7” display with touch screen;
- Ultra-thin design (22mm);
- Built in Wi-Fi for call divert or mobile calling via App
- Made of high-quality ABS plastic.
- PIP and QUAD view

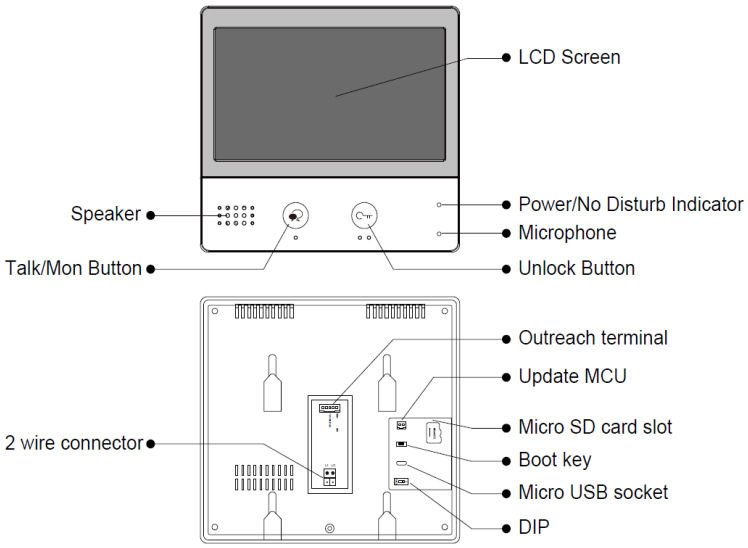

Parts & Functions

- SW+ / SW-: Extra doorbell call button connection port
- Ring / GND: Extra buzzer connection port
- POW / GND: 12~16V extra power connection port
- DIP Switches: Used to program the monitor address
- BIT1 ~ BIT5: User code setting (address)
- BIT6: Video impedance matching
- L1 / L2: BUS line terminal

Specification

- Input Voltage: 20~28V DC
- Power Consumption: Standby 1.7W – Working 8.2W
- Screen Size: 7” IPS Full view angle TFT
- Display Resolution: 1024 x 600 pixels
- Wiring: 2 wires non-polarized
- Operating Temperature: -10°C to+50°C
- Dimension: 161 x 174 x 22mm (HxWxD)