A2100 Video BUS power supply


Introduction

The power supply unit has two connection terminals, BUS(IM) and BUS(DS).

BUS(IM) – connection terminal for indoor monitors, video distributor/raiser unit A2200


BUS(DS) – connection terminal for a single door station or multi entrance switch A2300 for up to 4 door stations.

The unit has built in short circuit, overload and over voltage protections.

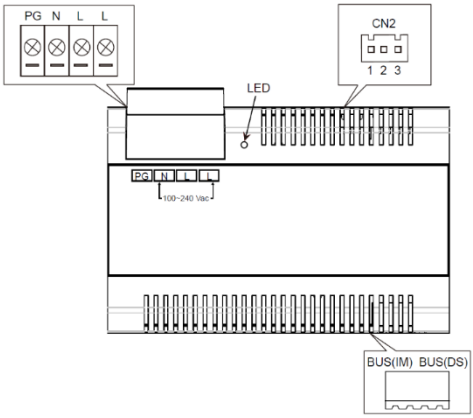

Specification

Input Voltage:	100 ~ 240Vac
Input Frequency:	50 ~ 60Hz
Rated Output Voltage:	DC 26V
Rated Output Current:	1.5 A
Working Temperature:	20C ~ +55C
SW Port Input Voltage:	Max.230Vac, 2A
Dimension:	140*90*60mm

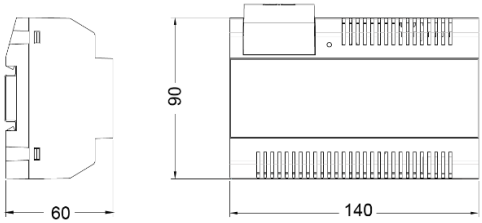

Terminals

PG-Earth/Ground terminal

N-Mains input (Neutral)

L-Mains input (Live)

L-Mains input (Live)

CN-BUS control terminal

BUS(IM)-Indoor monitors terminal

BUS(DS)-Door station terminal

ATIGO