
A2300 Video distributor


Introduction

The distributor unit can connect max. of 4 door stations in multiple entrance system configuration.

The unit can also be used as a basic video distributor for indoor monitors. In this configuration impedance switch on the last A2300 (end of bus line) should be set ON. The power indicator will turn to orange after setting.

DIN rail mounting

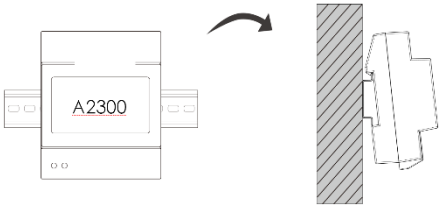

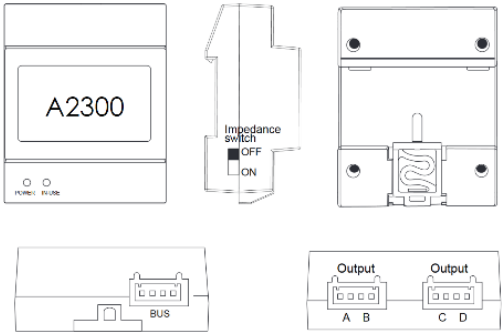

POWER – Operation indicator illuminates when power is on.

IN USE – Status indicator illuminates when signal is present

Specification

Power Supply: 20 ~ 30V

Working Temperature: -10C ~ +40C

Wiring: 2 wires (non-polarity)

Dimension: 89*71*45mm

ATIGO