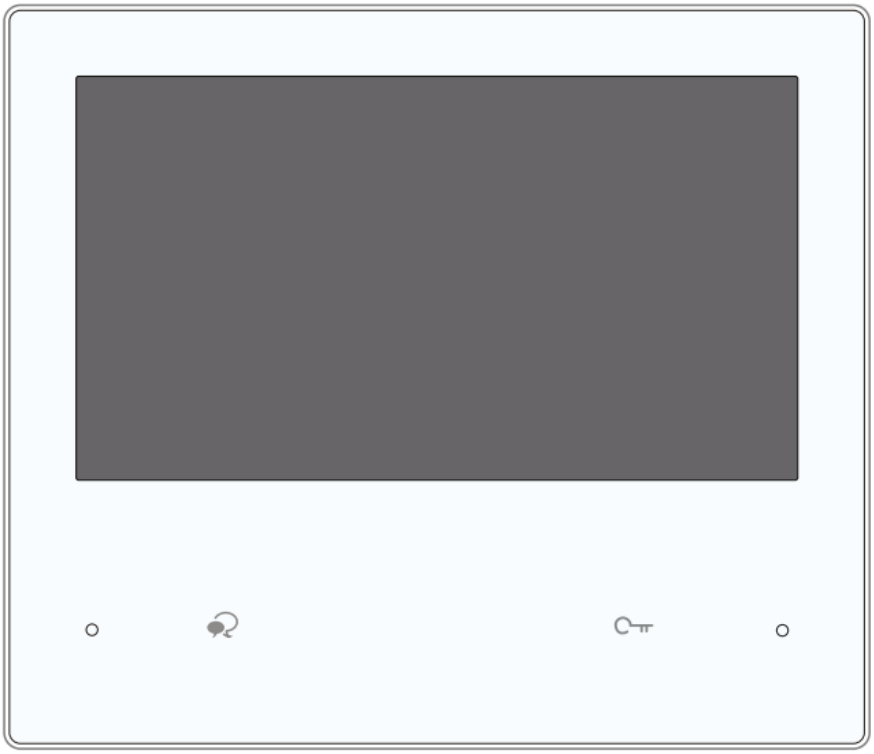



Features


- Mute function.
- Anti-aging glass. Does not dis-colour with age.
- Lock release button
- Connects to VDP connect APP via Wi-Fi
- PIP and Quad view
-

Specification

- Power Source : Power-over-Ethernet (IEEE 802.3af Class 0)
- LAN Interface : 10 BASE-T / 100 BASE-TX Ethernet (RJ-45)
- Monitor screen: 7’’ IPS full view angle TFT
- Display Resolutions: 1024*600 resolution
- Wire Type: Cat-5e or Cat-6
- Wiring Distance : 100m (Approx. 330')
- Operating temperature: -10 to +50 (°C)
- Dimension: 159 × 185 × 18.5 (HWD)mm

Parts & Functions

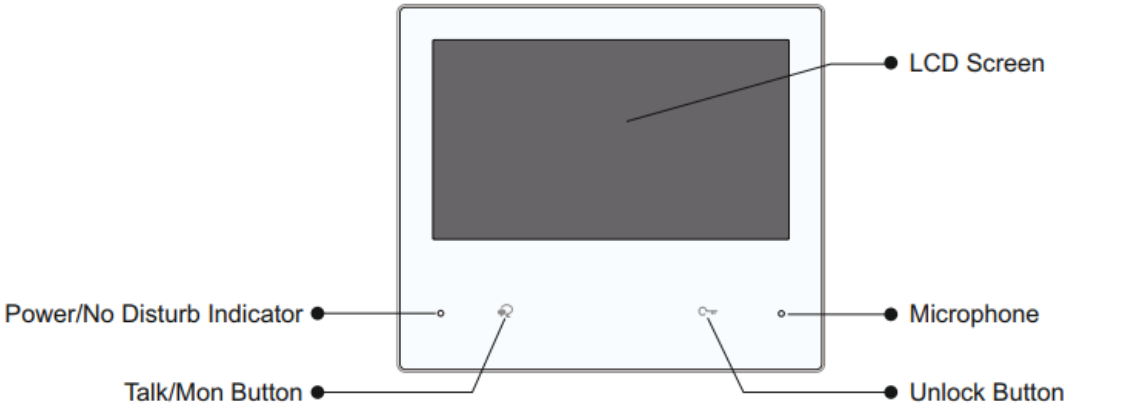

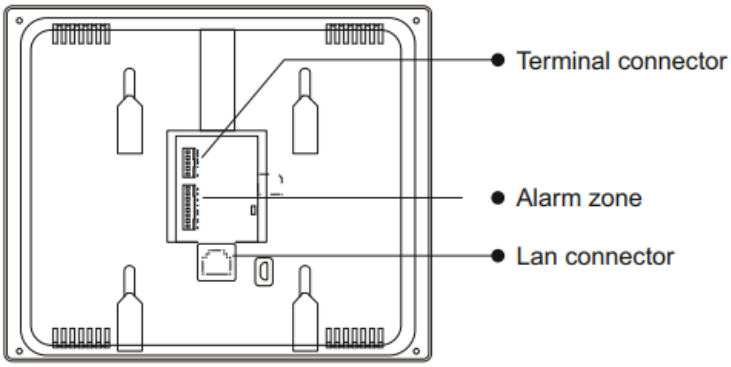

- **Power / Do-Not-Disturb indicator:**
  - Show the power status of the system.
  - Show the Do-Not-Disturb status.
- **Talk/Mon button:**
  - Press to communicate hands free with visitor
  - Press to view the outdoor condition in standby mode.
- **LCD screen:** Display the visitors' image.
- **Microphone:** Transmit audio from one station to other stations.
- **Unlock button:** Press to release the door.
- **Terminal connector:**
  - **SW+,SW-:** Extra door bell call button connection port.
  - **P+,P-:** Use to connect 24V local power supply
  - **LAN connector:** Use to connect the indoor station to the network.